


# WORKFLOW

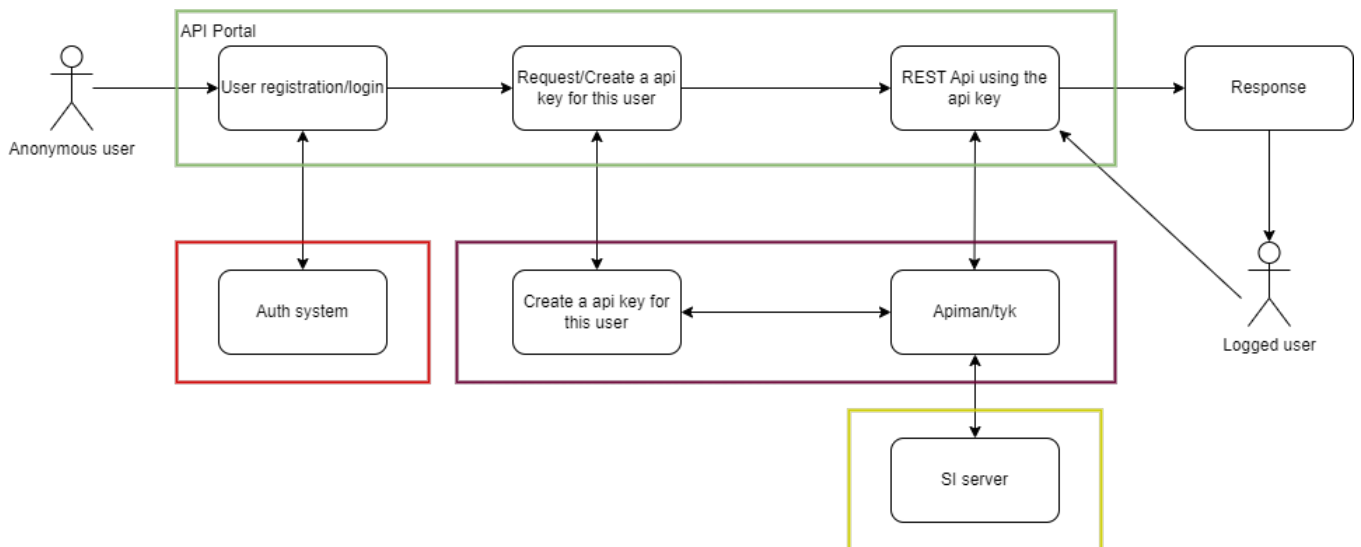

Admin:

Each user will have an api key/s.

Hooks: <https://tyk.io/docs/basic-config-and-security/security/key-hashing/>

key list:

Api key manager:

Get by key number:

localhost:8080/tyk/keys/10a4a4dba47a749ebb94458182065e365

Create new key:

localhost:8080/tyk/keys/create

Body:

```
{
  "name": "httpbin.org - Bearer Token Auth",
  "api_id": "2",
  "org_id": "1",
  "version_data": {
    "not_versioned": true,
    "versions": {
      "Default": {
        "name": "Default",
        "use_extended_paths": true
      }
    }
  },
  "meta_data": {
    "user": "test"
  },
  "active": true
}
```

```
}
```

Get all key

localhost:8080/tyk/keys/

```
{
  "keys": [
    "a813594a",
    "818c0752",
    "826a93b0",
    "09b38ec3",
    "f5010cf4",
    "2ad8ba21",
    "7c58c30c",
    "e9da1b2d",
    "34155adf",
    "6aa41d8d",
    "e00d5c08",
    "6bb9f1bf",
    "2723dfa7",
    "4376fe4e",
    "ba87af33",
    "457e0f2d",
    "fc2b9a13",
    "1818c0752",
    "d64b47b9",
    "84b093ca"
  ]
}
```

Call SI server

---

🔄Revision #9

★Created Wed, Feb 15, 2023 2:56 PM

✎Updated Wed, Feb 15, 2023 7:10 PM